



Part # LS-C-SPLAT XX

122911



- STEP 1: Unscrew and remove nut from Splat clock mechanism.
- STEP 2: Place splat onto clock mechanism. Screw nut onto clock mechanism. Insert HOUR hand followed by MINUTE hand and plug.
- STEP 3: Insert one AA battery (not included) in clock mechanism.

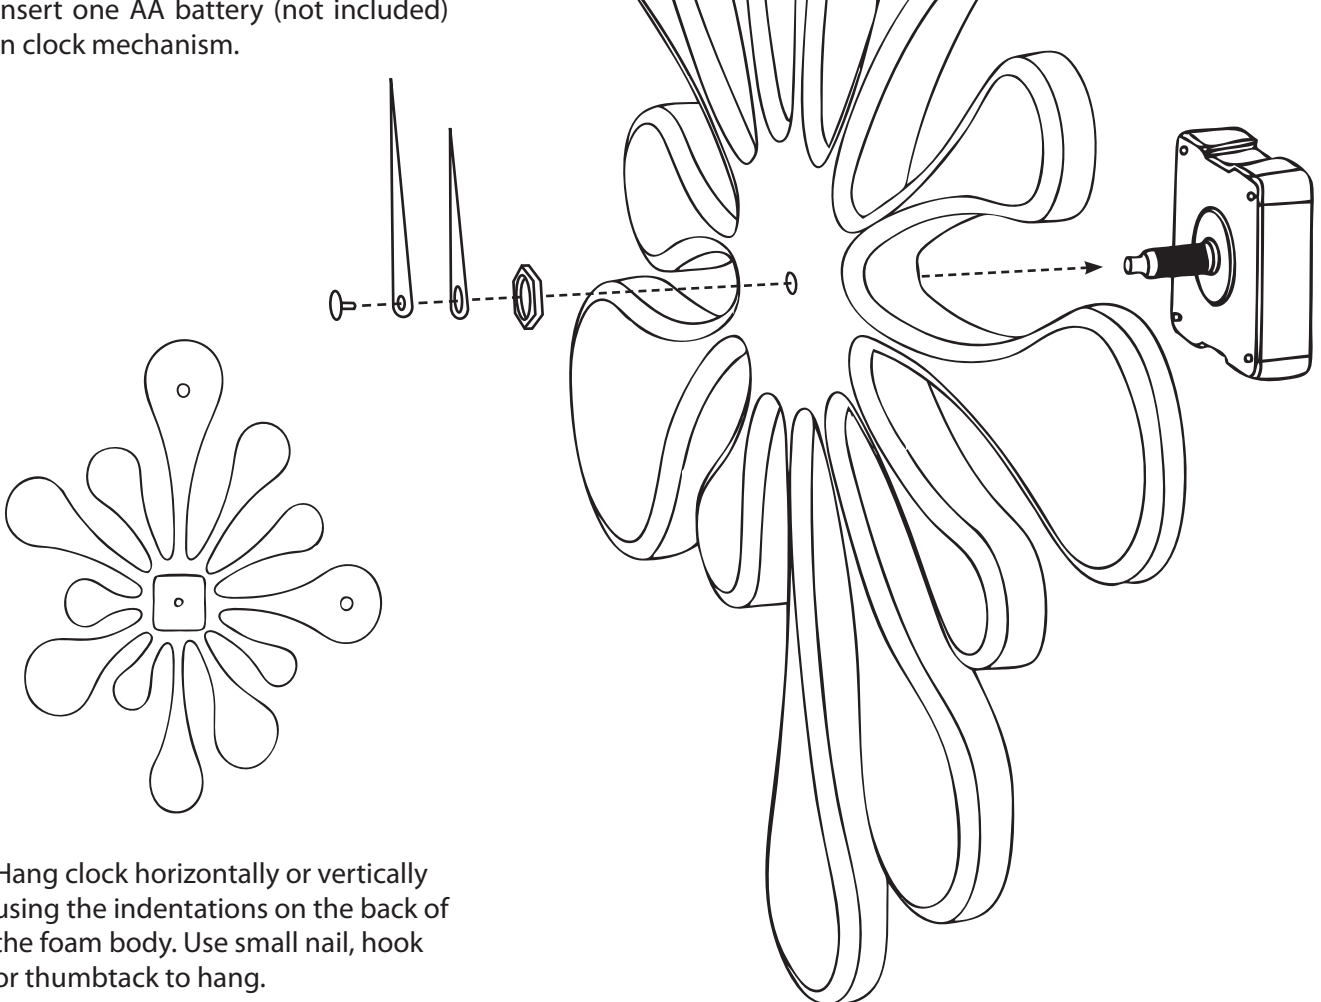

- STEP 4: Hang clock horizontally or vertically using the indentations on the back of the foam body. Use small nail, hook or thumbtack to hang.